





### REAR – FRONT – REVERSIBLE TYPE

## FEELER PIN OPERATION WITH DOUBLE ACTING CYLINDER

- Cut-tube profile frame
- 2 adjustable supporting rubber wheels
- Hydraulic system
- 550 mm long blade tool
- 12V electric button panel to control:
  - 1. Hydraulic, independent inclination of right/left blade head on bumpy ground  $+15^{\circ}$  -  $15^{\circ}$
  - 2. Hydraulic right-left sides telescopic extension: 500 mm
  - 3. Singular emergency retraction of right or left tools
  - 4. Simultaneous emergency retraction of right and left tools

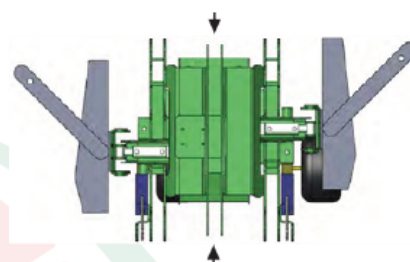

| MOD.    | Kg. |  |           | <br>HP |  |  |
|---------|-----|------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| PICCOLO | 580 | B 180                                                                              | B 1 - 250 | 60                                                                                       | 5-20                                                                                | 180-250                                                                              |
| MEDIO   | 680 | B 250                                                                              | B 1 - 330 | 60                                                                                       | 5-20                                                                                | 250-310                                                                              |
| GRANDE  | 750 | B 280                                                                              | B 1 - 350 | 70                                                                                       | 5-20                                                                                | 280-350                                                                              |
| MAGNUM  | 790 | B 300                                                                              | B 1 - 380 | 70                                                                                       | 5-20                                                                                | 300-380                                                                              |

## COMBY DX-SX EASY *Electronic*

- System operation with tractor oil
- TRACTOR: with 1 pair of hydraulic double-effect jacks
- TRACTOR 50 lt /min oil



PULSANTIERA  
ELETTRICA

[illegible]



**BARING MACHINE MOD.  
COMBY DX-SX**



### REAR – FRONT – REVERSIBLE TYPE

## FEELER PIN OPERATION WITH DOUBLE ACTING CYLINDER

## COMBY DX-SX PLUS *Electronic*

- System operation with tractor oil
- TRACTOR: with 1 pair of hydraulic double-effect jacks
- Oil cooler
- TRACTOR 50 lt /min oil

[illegible]

**COMBY DX-SX TOP *Electronic***


- System operation with oil tank and pump
- TRACTOR: PTO 540 or 1000
- Cardan Shaft
- Kit pump fixed to the chassis (2 pumps)



|  |  |
|--|--|
|  |  |
|  |  |
|  |  |
|  |  |
|  |  |

|  |
|--|
|  |
|  |
|  |

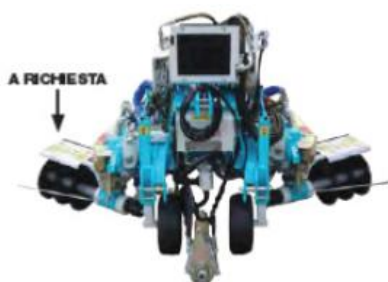

### COMBY DX-SX PREMIUM *Electronic*

- System operation with oil tank and pump
- Pulsante ON OFF utensili idraulici
- OIL COOLER
- KIT FOR HYDRAULIC TOOLS
- TRACTOR: PTO 540 or 1000
- CARDAN SHAFT
- Kit pump fixed to the chassis (3 pumps)

### KIT FOR HYDRAULIC TOOLS

|  |
|--|
|  |
|  |
|  |
|  |

ELECTRIC  
PUSH-BUTTON  
PAD



|  |
|--|
|  |
|  |
|  |

ON DEMAND

### Per MOD. EASY - PLUS - TOP - PREMIUM



INCREASED INCLINATION KIT

**Mod. DX -SX**

Cod. COMB

### Per MOD. EASY - PLUS




HYDRAULIC PIPES

For front application without PTO  
Length 5200 mm

N. 1 da 3/4

N. 1 da 1/2

### Per MOD. TOP - PREMIUM



3 POINT CHASSIS

Without pump, without oil

**Mod. DX**

Cod. EX 020





HYDRAULIC PIPES


For front application without PTO  
Length 5200 mm

| Comby TOP                  | Comby Premium              |
|----------------------------|----------------------------|
| N. 2 da 3/4<br>N. 2 da 1/2 | N. 1 da 3/4<br>N. 3 da 1/2 |
|                            |                            |

**COMBY DX-SX TOP AND PREMIUM  
STANDARD**

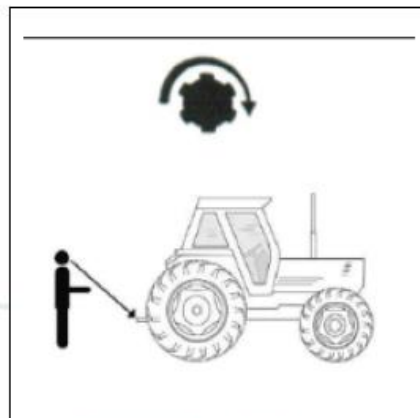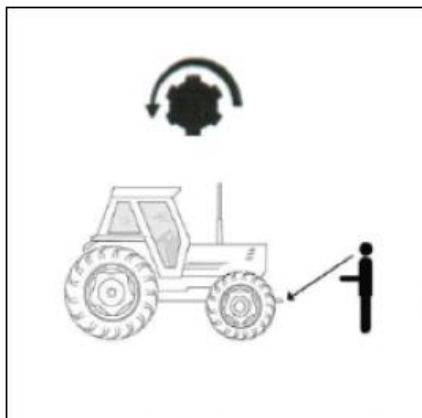

**REVERSIBLE**

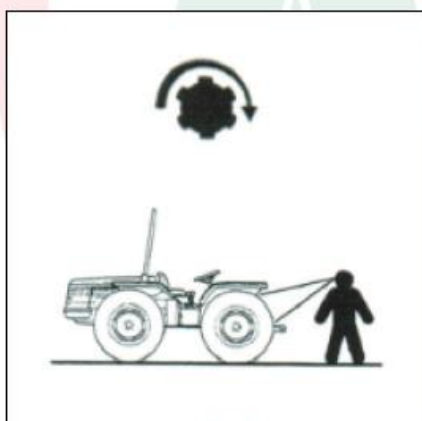

**REVERSIBLE KIT**



