



MONDIALE 120 COMBI
Combined round baler

BAILING AND WRAPPING IN JUST ONE FIELD PASS

ALL IN ONE!

MONDIALE 120 COMBI represents the perfect solution either for haylage, baleage or silage operations. Thanks to the baler - wrapper combination, the hay gets picked, pressed and filmed by the same machine, with no contamination due to soil contact or unfavourable weather conditions.

This one pass baling and wrapping solution will reduce work time, fuel consumption and soil compaction. MONDIALE 120 COMBI is equipped with ON LINER PRO wrapper which is made of a three rollers platform and two automatically controlled 750 mm film stretchers.

Once wrapped, the bale can be ejected laying on the ground or standing vertically through a rollover ramp.



The holding-down windrow

The deflector, with a big diameter roller, prepress the windrow and ensures a optimum product flow to allow a higher working speed.




Smooth running

Fitted with pneumatic tyres, the touch wheels work in perfect balance with the pick-up and run without any contact with the ground reducing contamination. Adjusting the height of the touch wheels is quick and easy by pin.



Opening drop floor

In case of clogging, MONDIALE 120 COMBI can hydraulically lower the drop floor from the cab of the tractor allowing the blockage to be freed. The drop floor can then be reset and baling can resume.

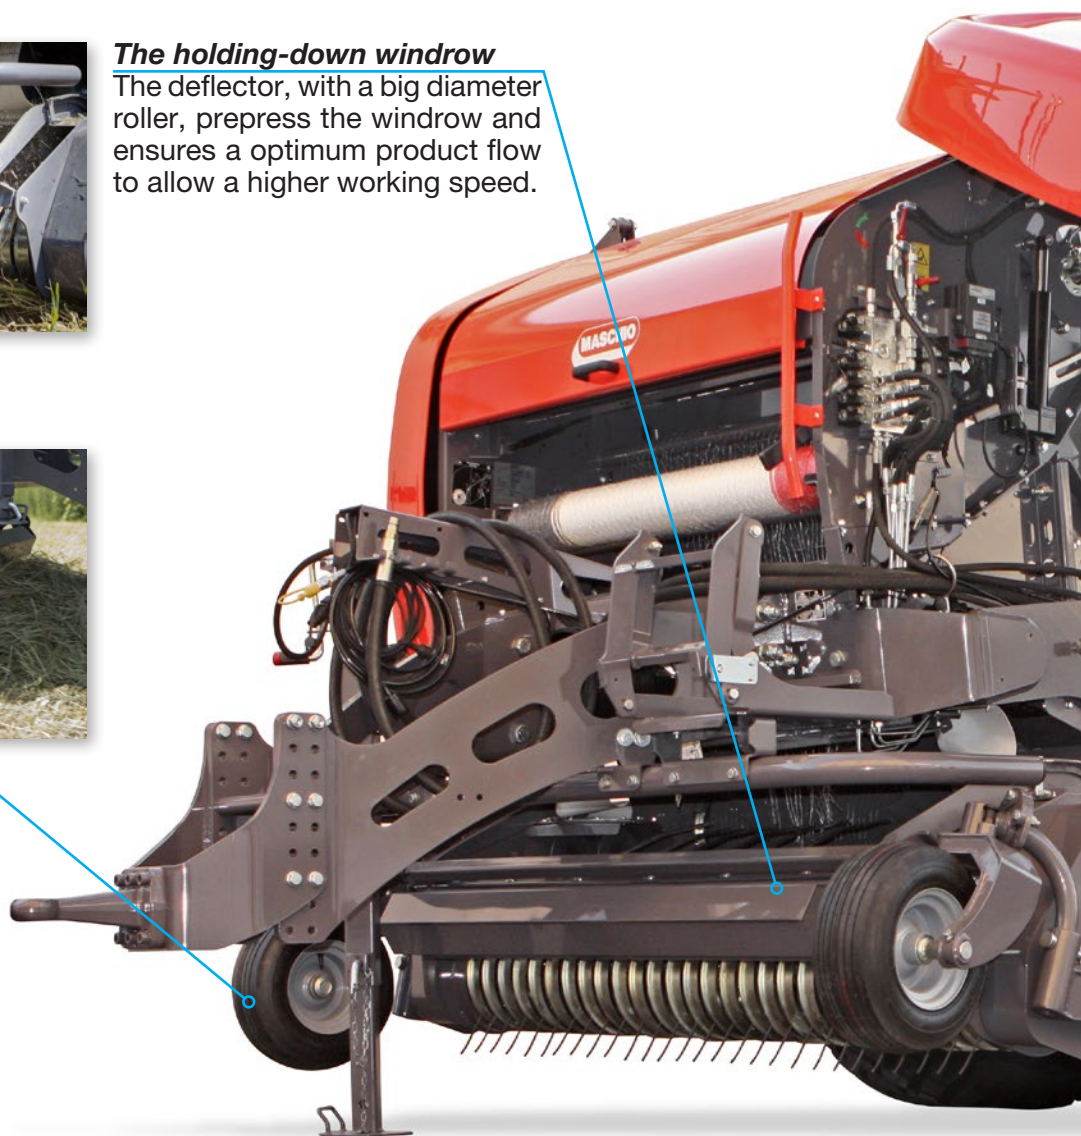




Keep on grip

MONDIALE 120 COMBI is a fixed round baler with 19 rollers and a specific design to maintain a constant grip on haylage even with high humidity. A direct control of the chamber pressure (up to 190 bar) is possible from the monitor.



New wrapper design

The satellite wrapper with its two pre-stretchers ensures a very fast wrapping. The machine has also automatic film rupture sensors which automatically compensate for eventual film layers loss. If one of the films brakes or the roll runs out, it provides the set amount of film layers from the other stretcher.

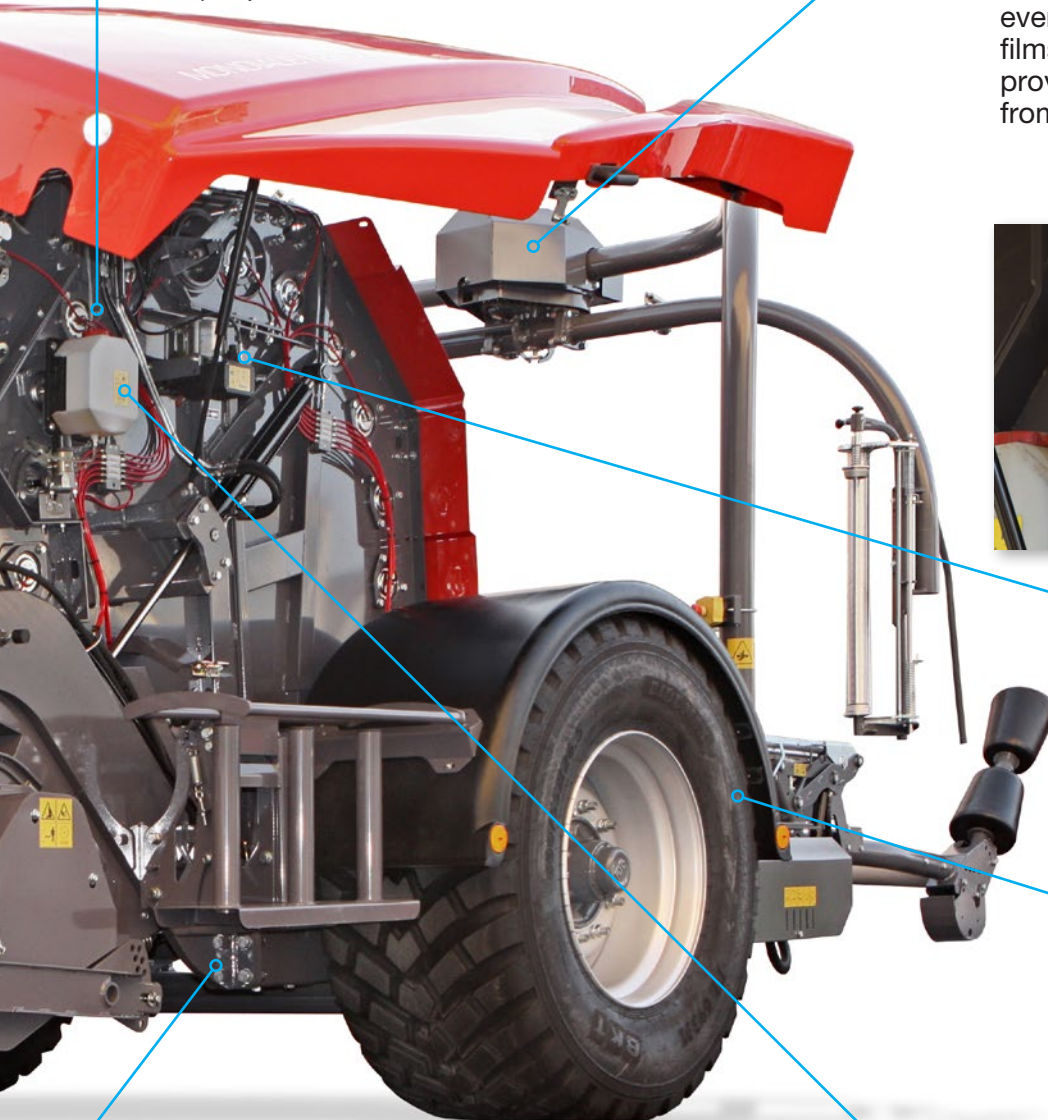

Automatic greasing

The fully automatic grease lubrication is used to supply sufficient lubrication to all the bearings of the rollers, ensuring long life for the machine.

Tyres

Large tyres available in three size to reduce soil compaction:

- 600/55-26,5
- 700/55-26,5
- 800/55-26,5



Chain lubrication

MONDIALE 120 COMBI is equipped, as a standard, with a continuous chain oiling system. Sturdy and wide oil brushes on the chain ensuring a perfect lubrication.



Haylage is better!



Monitor control

An intuitive graphic design makes the monitor easy to be used and practical during work operations. From the monitor is possible to manage and keep under control every single phase of the work:

- The pressure of the chamber
- Knives positioning
- Roller lubrication
- Manual/Automatic baling process
- Net wrap and film number of layers
- Automatic Knife cleaning system




HTC version

Cutting system with 15 knives and cutting length of 77mm. Fake knives available to work without cutting.

HTU version

Cutting system with 25 knives, cutting at 45mm length. From the tractor's cab there is also the possibility to select the number of knives to use: 0-12-13-25.

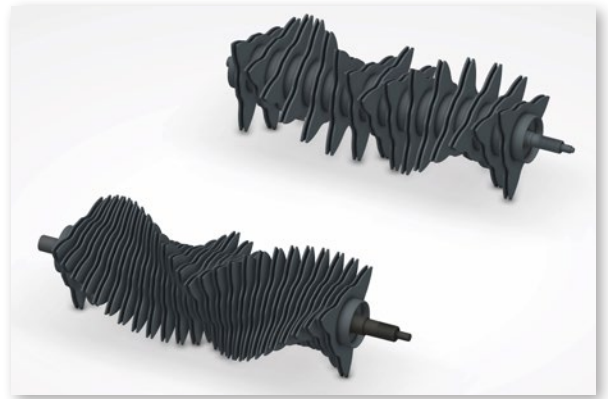

Safety knives system

Each knife is spring controlled, so it is protected in case of product excess or any object inside the machine. Immediately afterwards it comes back automatically in the working position.



MONDIALE 120 COMBI

4 REASONS TO MAKE HAYLAGE!



Haylage doesn't need to be dried so the farmer can harvest the product at any time, saving operativity.



Prevent any contamination by the ground, dust and weather conditions, ensuring a healthy feed for your cows.









High nutritional quality and higher animal appetite improve the animal rate daily feed, ensuring every time the complete ingestion.



The plastic film protects the product keeping it in anaerobic condition. This system is the cheapest solution for storage bales even in open field.

Technical data

						
	KW/HP	mm	mm	n°		Kg
TOPCUT	80 - 110	2200	1200	15	Net tying	5900
ULTRACUT	95 - 130	2200	1200	25	Net tying	5980





MASCHIO Fienagione S.p.A.

Headquarters and production plant
Via Bredina 6
I-26100 CREMONA (CR) - Italy
Tel. +39 0372 564610 - Fax +39 0372 564625
info@maschio.com - www.maschio.com

MASCHIO GASPARDO S.p.A.

Via Marcello, 73
I-35011 Campodarsego (PADOVA) - Italy
Tel. +39 049 9289810 - Fax +39 049 9289900
info@maschio.com - www.maschio.com